
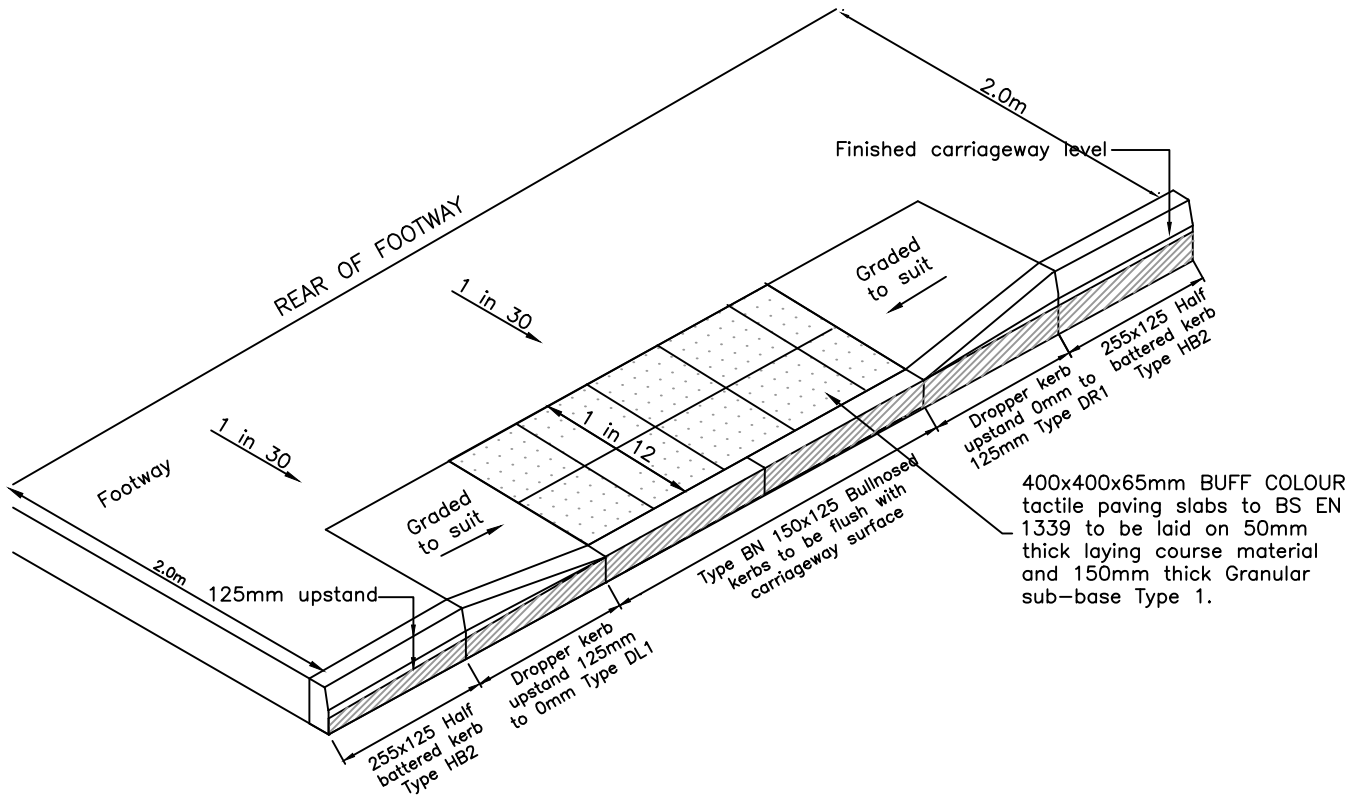


Rev.	Amendments	Date	Made By	Chk'd By

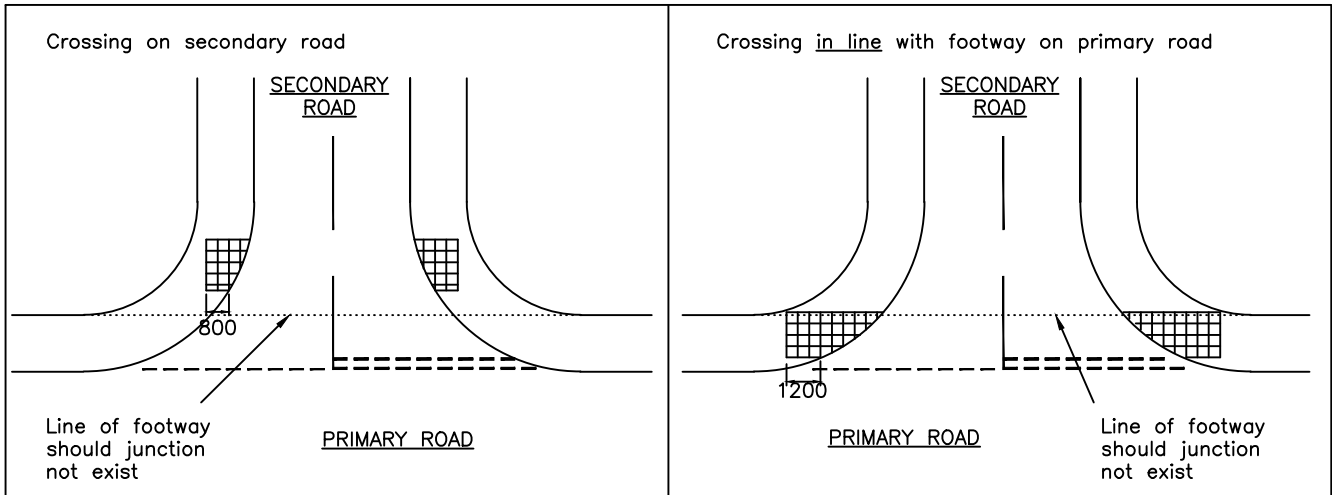

NOTES

1. All dimensions are in millimetres unless otherwise stated
2. Kerbing may be radius kerbing in which case the minimum depth of tactiles shall be 800mm
3. Tactiles must cover the full extent of dropped kerb.
4. Raised domes must be lined up directly with those on the opposite side of the road.
5. Where tactiles will be in line with the footway on the primary road the minimum depth of tactiles shall be 1200mm
6. For further guidance refer to "Guidance on the Use of Tactile Paving Surfaces" by DETR.

UNCONTROLLED PEDESTRIAN CROSSINGS

HIGHWAY DESIGN GUIDE STANDARD DETAILS

RHONDDA CYNON TAF
COUNTY BOROUGH COUNCIL



Drawn	DA
Checked	SZ
Date	Apr '11
Scale	NTS
Drg. No.	150
Rev.	